


TECHNICAL DATA				Pump type DP-10BA/BS		
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	3.000	Cp	
Discharge volume/cycle	76	Cc	Max. viscosity (pos. suc.)	5.000	Cp	
Max. discharge volume	22	L/min	Max. air consumption	300	NL/min	
Max. discharge pressure	0,7	MPa	Max. noise level	82	dB(a)	
Max. size of solids	1	mm	Operating temp. ambient	70	°C	
Max. suction lift dry	T	2,5	Operating temp. fluid NBR/CR	82	°C	
Max. suction lift wet	T	5,5	EDPM/TPO/PTFE	100	°C	
Max. suction lift dry	R	3,0	FPM/TPEE	120	°C	
Max. suction lift wet	R	6,3				
Max. liq inlet pressure	T	0,02	MPa	Weight	type A	3,6 Kg
Max. liq inlet pressure	R	0,1	MPa	Weight	type S	5,3
Caution! Data based on water (1 Cp)						



DP PUMPS REQUIRE A FRL UNIT TO LUBRICATE THE COMPRESSED AIR

FRL-2

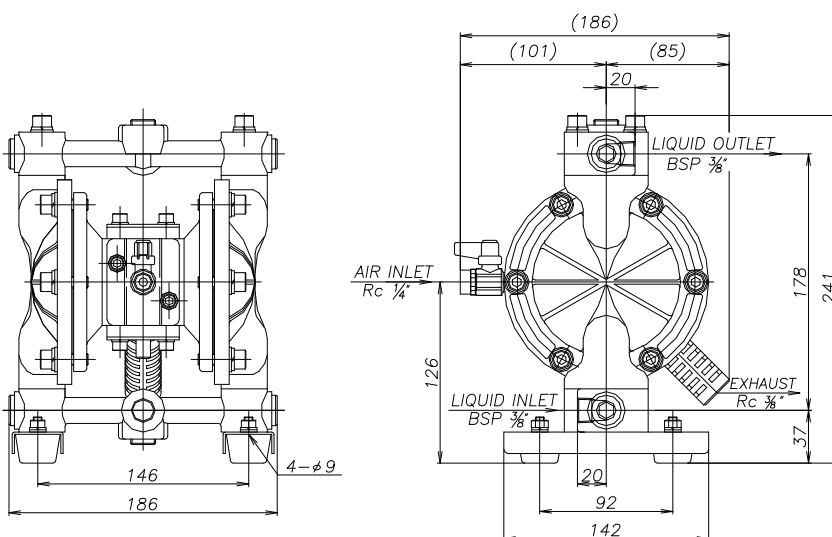