




NDP-32 Serie

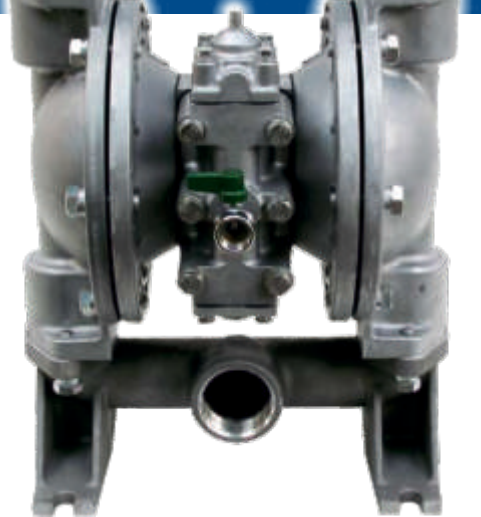

Have you ever wanted to switch out your old pump for a Yamada, but faced re-piping issues? With the new **NDP-32 Serie** Pump from Yamada, your problems are solved. This new 1-1/2" inlet X 1-1/4" outlet matches up dimensionally with that old competing brands design. Now your conversion to Yamada is just much easier.


FEATURES

- Inlet 40A/Outlet 32A
- Upward discharge port and horizontal inlet port
- Easy to connect to upward discharge pipe
- Explosion proof, self priming and no mechanical seals


SPECIFICATIONS

Type	NDP-32	
	BAN	
Fluid Connection	Suction Port	Rc 1-1/2
	Discharge Port	Rc 1-1/4
Air Connection	Supply Port	Rc 3/8
	Exhaust Port	Rc 3/4
Operating Air Pressure		2~7 Bar
Maximum Discharge Pressure		7 Bar
Discharge Volume/cycle		670 mL
Maximum Discharge Volume		190 L/min
Maximum Air Consumption		2.000 L/min (ANR)
Slurry Limitation		4,8 mm or less
Limitation of Viscosity		Negative suction: 3.000 cP Positive suction: 8.000 cP
Operating Ambient Temperature Range	Temp.	0~70 °C
	Fluid Temp.	0~82 °C
A-weighted emission sound pressure level		81 dB
A-weighted sound power level		95 dB
Weight		12,0 kg

DIMENSIONS

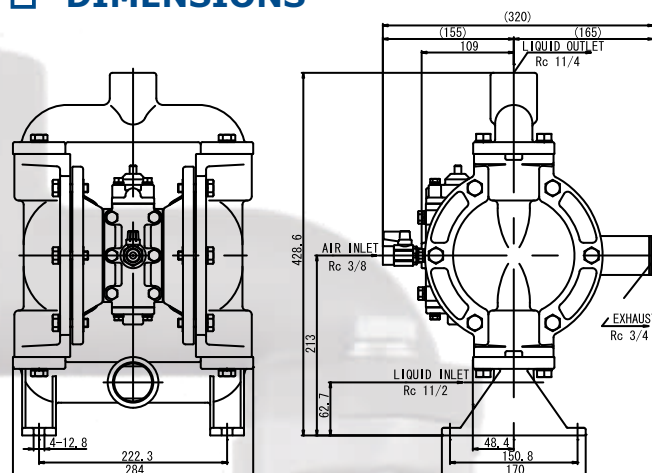

PERFORMANCE CURVE

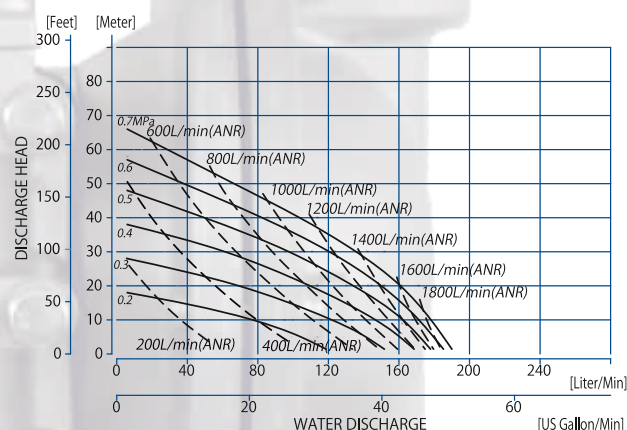


Yamada Europe B.V.

Aquamarijnstraat 50
7554 NS Hengelo
The Netherlands

Phone : +31 (0)74-24 220 32

Fax : +31 (0)74-24 210 55

Email : sales@yamada-europe.com

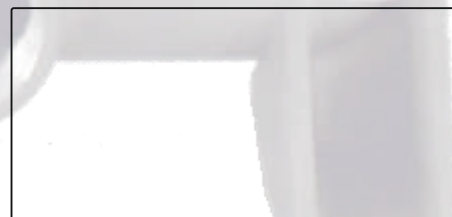

Yamada Distributor

