



TEF4-50YD

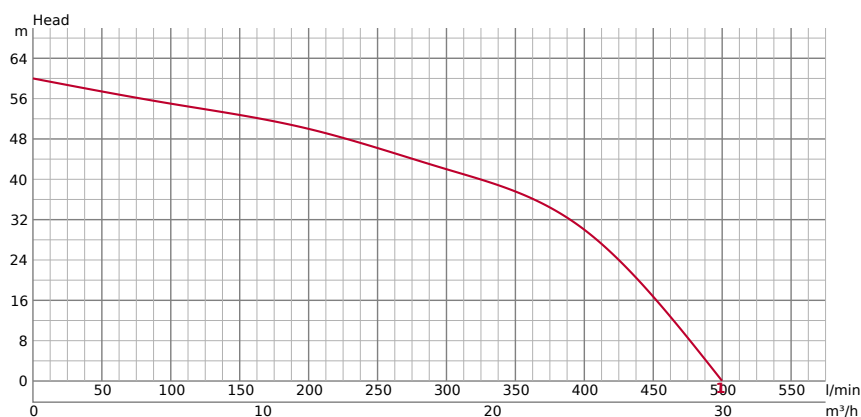

TECHNICAL INFORMATION

GENERAL	Inlet x Outlet Bore		50x25/25/40 (2"x1"/1"/1.5")
	PUMPING FLUID		Type of Fluid: Clear Water Temperature: 0-40°C Max. Solid Handling mm: 1 Max. Capacity l/min: 500 Max. Head m: 60
PUMP	MATERIAL		
	Impeller	Cast aluminium	
	Casing	Cast Aluminium	
	Mechanical Seal	Carbon Ceramic	
MOTOR	Motor output kW		4,8
	Brand		Yanmar
	Engine Model		L70
	Fuel		Diesel
	Fuel Tank Capacity		3.3 L
	Starting System		Recoil Starter
OTHERS	Dry Weight Kg		56
	Packing Measurment LxWxH in mm		710x520x645


TEF3-50HA

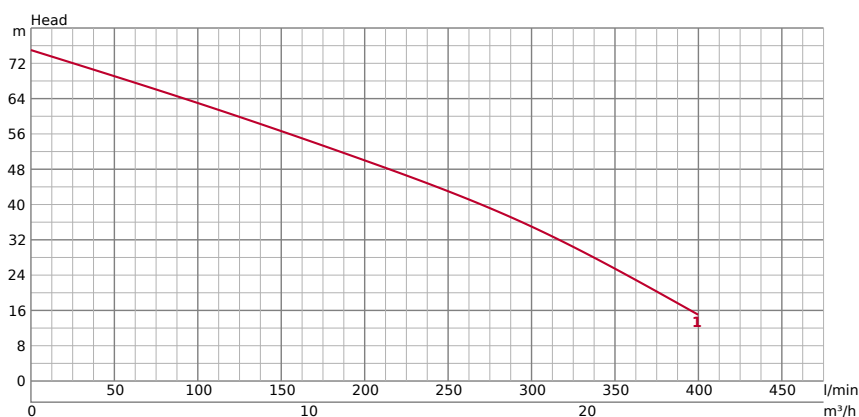

TECHNICAL INFORMATION

GENERAL	Inlet x Outlet Bore	50x25/25/40 (2"x1"/1"/1.5")
PUMPING FLUID	Type of Fluid	Clear Water
	Temperature	0-40°C
	Max. Solid Handling mm	1
	Max. Capacity l/min	400
	Max. Head m	75
PUMP	MATERIAL	
	Impeller	Cast aluminium
	Casing	Cast Aluminium
	Mechanical Seal	Carbon Ceramic
MOTOR	Motor output kW	3,6
	Brand	Honda
	Engine Model	GX160
	Fuel	Petrol
	Fuel Tank Capacity	3.1 L
	Starting System	Recoil Starter
OTHERS	Dry Weight Kg	27,6
	Packing Measurment LxWxH in mm	545x410x485

TEF-25HA

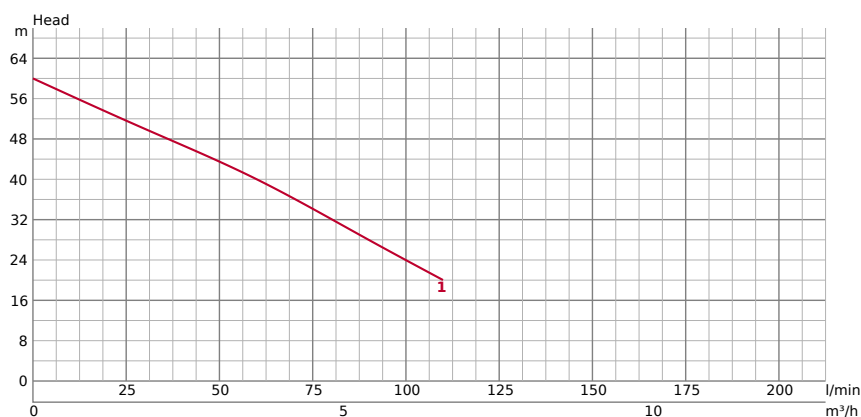

TECHNICAL INFORMATION

GENERAL	Inlet x Outlet Bore	25x25 (1"x1")
PUMPING FLUID	Type of Fluid	Clear Water
	Temperature	0-40°C
	Max. Solid Handling mm	2
	Max. Capacity l/min	110
	Max. Head m	60
PUMP	MATERIAL	
	Impeller	Cast aluminium
	Casing	Cast Aluminium
	Mechanical Seal	Carbon Ceramic
MOTOR	Motor output kW	1,6
	Brand	Honda
	Engine Model	GXH50
	Fuel	Petrol
	Fuel Tank Capacity	0.77 L
	Starting System	Recoil Starter
OTHERS	Dry Weight Kg	11
	Packing Measurment LxWxH in mm	410x310x455