

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60215911C

Customer pos. no.:
Model :

DELS 70/1000 WMS

Pump data

Pressure rating : --
Min. fluid temperature : 3 °C
Max. fluid temperature : 40 °C
Max. Ambient temperature : 40 °C

Requested data



Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,00234 MPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Tank PE / OT58
Middle cover PP 30% GF
Top cover PP 30% GF
Non-return valve body PP 30% GF
Impeller Stainless steel
Motor casing Stainless steel
Mechanical seal pump side SiC/SiC
Mechanical seal motor side Carbon/Alumina

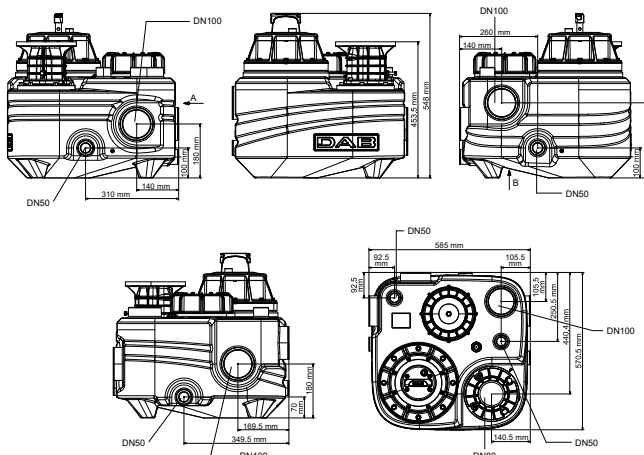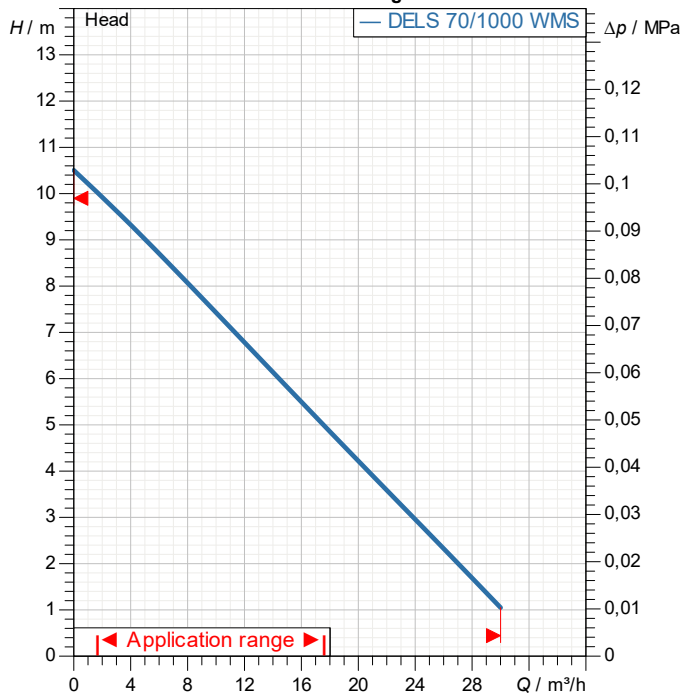Curve tolerance according to ISO 9906

Motor data

Motor brand : DAB
Max Power input P1 : 1,75 kW
Nominal power P2 : 1 kW
Rated voltage : 1~ 220-240 V
Nominal current : 8 A
Rated speed : 2.800 1/min
Degree of protection : IP 68

Weight : 0 kg

Dimensions in mm

--	--	--	--	--	--

Pump connection

Suction side : DN 50/110
Ventilation : DN 50
Discharge side : DN 80


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DELS 70/1000 WMS

Curve tolerance according to ISO 9906

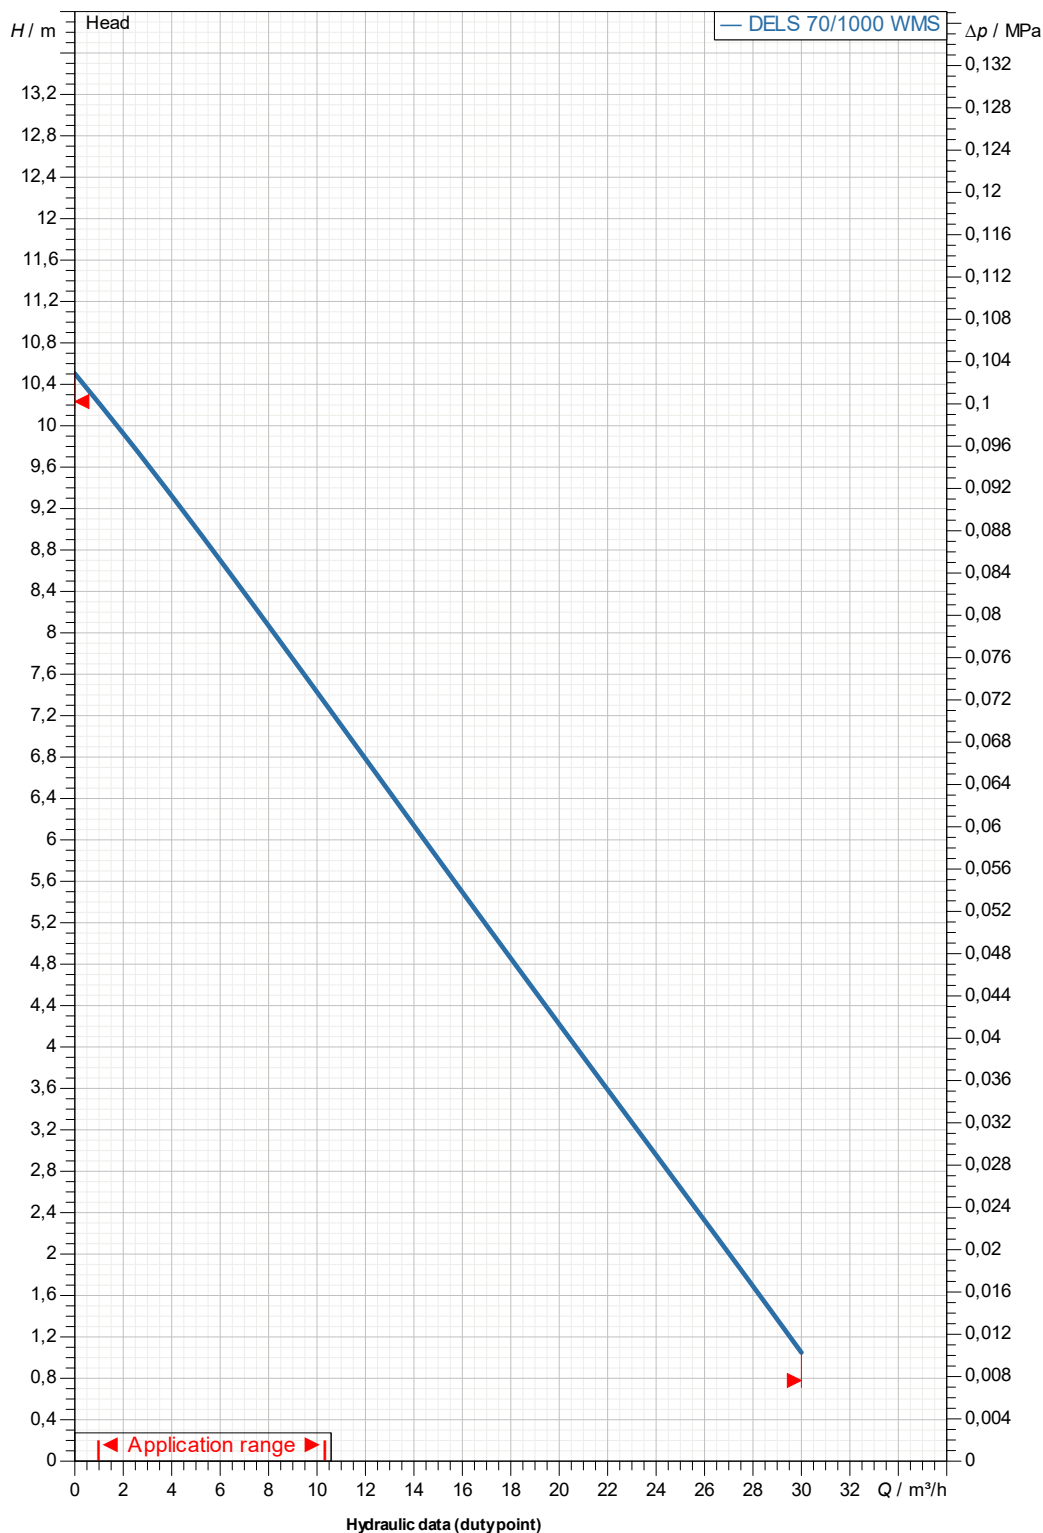

Suction side :
DN 50/110
--

Discharge side :
DN 80
--

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE


2026-01-15

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DELS 70/1000 WMS

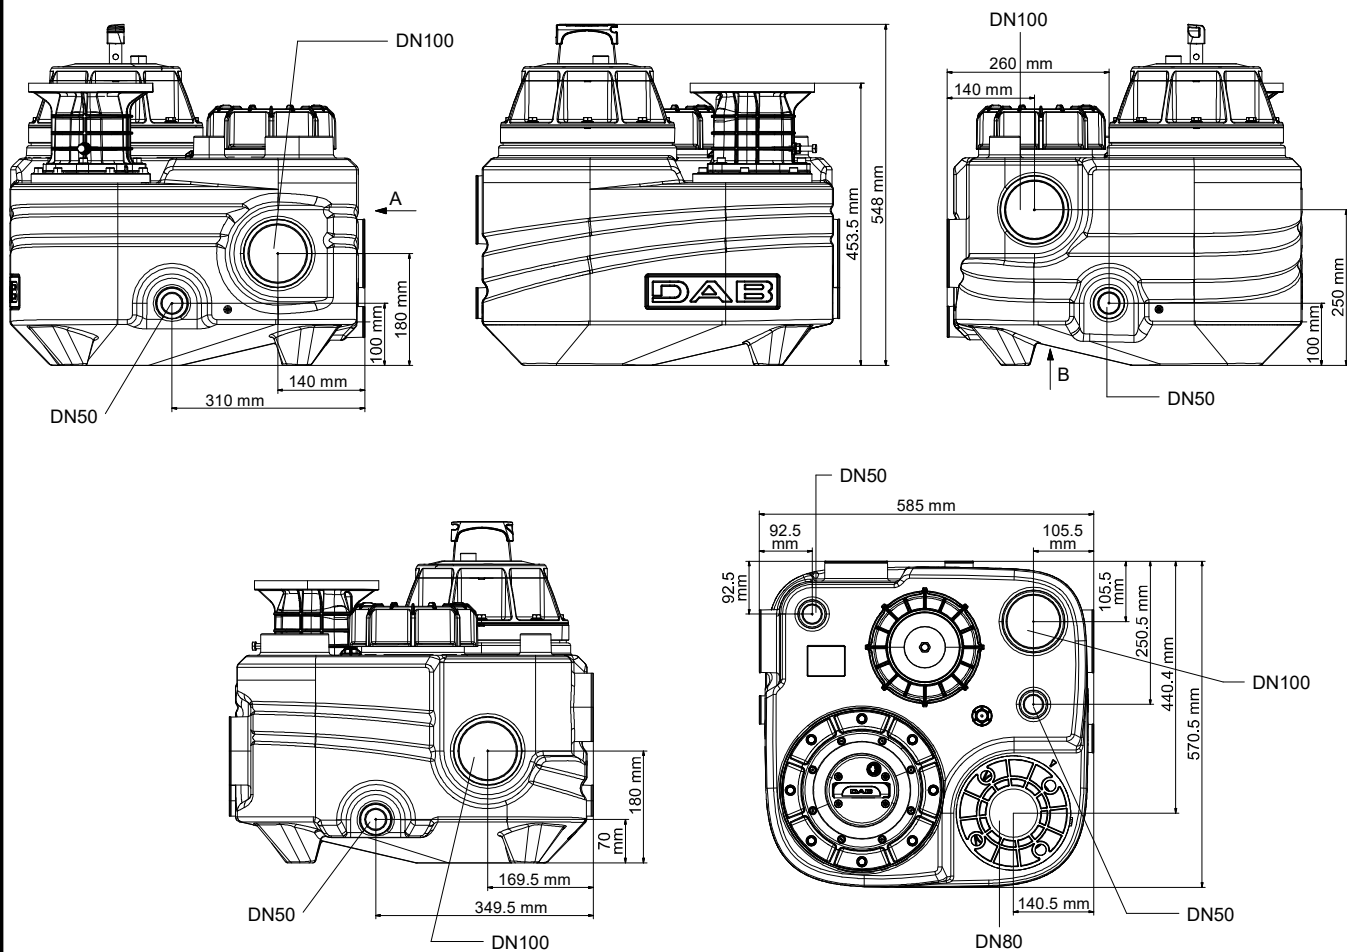

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

Suction
DN 50/110
--

Discharge
DN 80
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2026-01-15