

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Drainage station
Customer pos. no.:

FEKAFOS 280 2" DOUBLE

Item n° :

60163426

Pump type

FEKA VS GRINDER 1000 M - NA 50 Hz 230

Item n° :

60211234H

Pump data

Pressure rating :

--

Min. fluid temperature :

0 °C

Max. fluid temperature :

45 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid :

Water

Fluid Temperature :

20 °C

Density :

998 kg/m³

Kinematic viscosity :

1 mm²/s

Vapor pressure :

0,00234 MPa

Hydraulic data (duty point)




Flow :

Head :

Materials

Tank

LLDPE

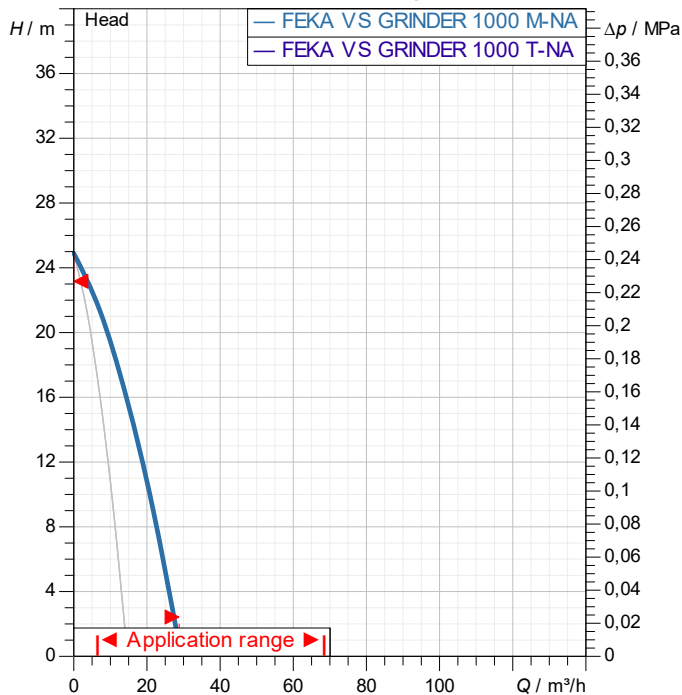Curve tolerance according to ISO 9906

Tank weight : 51 kg

Motor data
Dimensions in mm

Motor brand :

DAB

Nominal power P2 :

1 kW

Rated speed :

2.900 1/min

Rated voltage :

1~ 230 V

50 Hz

Nominal current :

6,4 A

Degree of protection :

IP 68

Pump connection

Suction side : DN 50/110

Ventilation : DN 50

Discharge side : 2" G


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKAFOS 280 2" DOUBLE

Curve tolerance according to ISO 9906

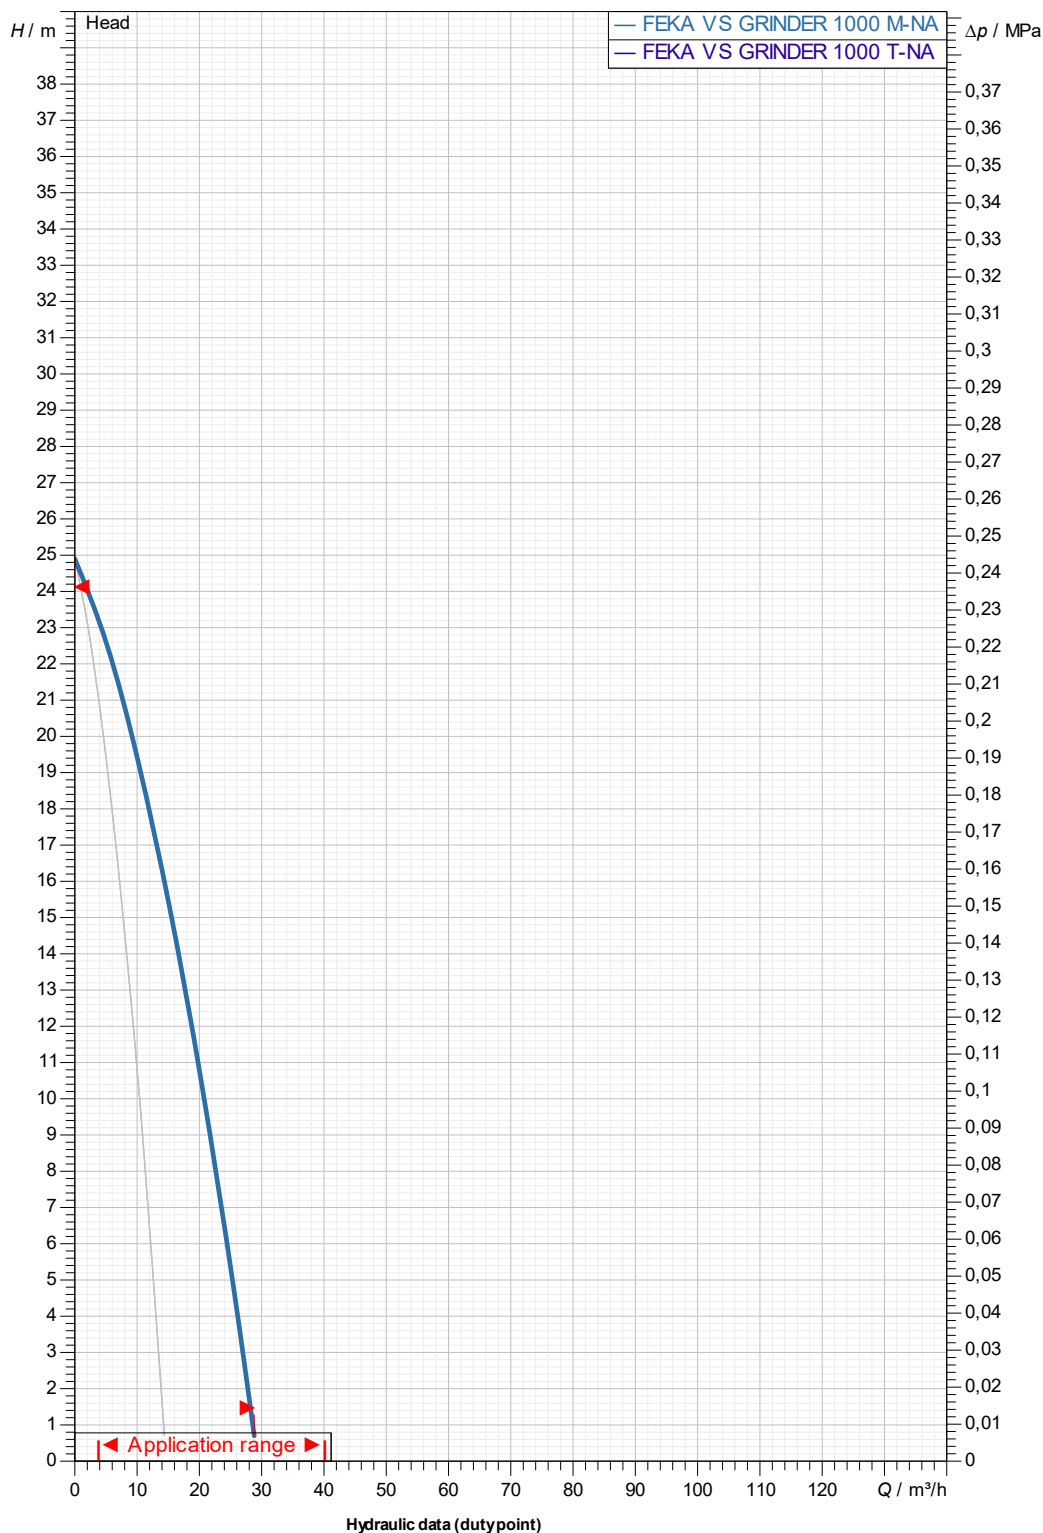

Suction side :

DN 50/110

--

Discharge side :

2" G

--

Flow :

Head :

Rated speed :

2.900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE



2026-01-15

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKAFOS 280 2" DOUBLE

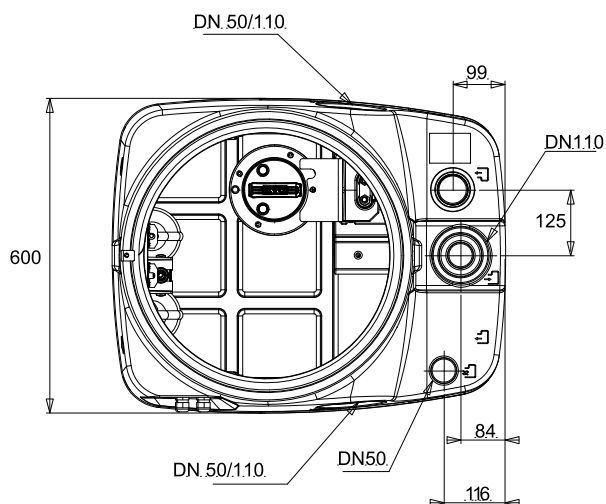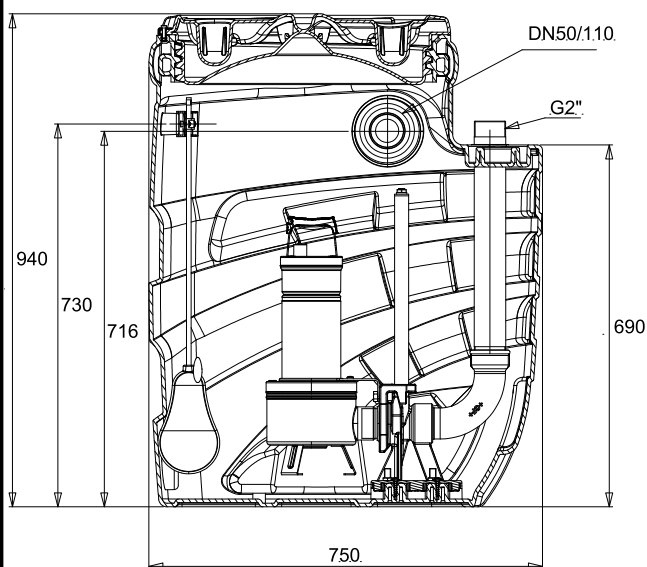

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

Suction
DN 50/110
--

Discharge
2" G
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2026-01-15